

Precision Calibration And Interconnect Solutions

Stability™ Microwave/RF Cable Assemblies

From



Model Series:

- SC-185 – 1.85mm color-coded Stability™ cables
- SC-24 – 2.4mm color-coded Stability™ cables
- SC-292 – 2.92mm color-coded Stability™ cables
- SC-35 – 3.5mm color-coded Stability™ cables
- SC-N – Type N color-coded Stability™ cables



Maury Microwave is ISO: 9001:2008/AS9100C Certified.



Stability™ Microwave/RF Cable Assemblies

Series SC-185, SC-24, SC-292, SC-35 and SC-N

Features and Benefits

- Amplitude and phase stable with flexure
- Reliable and repeatable measurements
- Durable, ruggedized, crush-resistant
- Longer flex life
- Also available in 2.92mm or 3.5mm Low-Profile and Thermal Vacuum configurations.

Typical Applications

- Vector network analyzers (VNAs)
- RF and microwave instruments
- Bench-top testing
- Probe station integrations
- RF production testing
- ATE systems

Description

Maury Microwave's Stability™ series sets the standard for high-performance ruggedized cable assemblies. Designed specifically for phase-stable and amplitude-stable applications, Stability™ offers excellent measurement repeatability even after cable flexure. With a ruggedized, durable construction, Stability™ will outlast and outperform other assemblies resulting in a reduced total cost-of-test. Stability's™ light weight, superior flexibility and small form factor make it ideal for daily use with VNAs, test instruments, bench-top testing and ATE systems.

Stability™ cable assemblies are now part of the ColorConnect™ family! Following the proposed IEEE high-frequency connector/adaptor color convention, Stability™ cable assemblies are the first commercially available assemblies to offer clear indications of compatibility and intermatability. ColorConnect™ makes it a simple matter to avoid and eliminate damaged equipment, degraded equipment reliability, degraded performance and lengthy maintenance times due to improper mating (and attempted mating) of incompatible interconnects.

Stability™ Specifications

STABILITY™ Cable Type	Frequency	Typical Phase Stability with Flexure	Typical Amplitude Stability with Flexure
SC-185	67 GHz	±8.0°	±0.08 dB
SC-24	50 GHz	±6.0°	±0.05 dB
SC-292	40 GHz	±5.0°	±0.05 dB
SC-35	26.5 GHz	±3.5°	±0.02 dB
SC-N	18.0 GHz	±2.0°	±0.015 dB



STABILITY™ SC-292-MM-36
Microwave/RF Cable Assembly

Cable Assembly Specifications

Electrical Properties¹

STABILITY™ Cable Type	SC-185	SC-24	SC-292	SC-35	SC-N
Maximum Frequency	67 GHz	50 GHz	40 GHz	26.5 GHz	18.0 GHz
VSWR	1.40 typ/ 1.50 max	1.30 typ/ 1.43 max	1.25 typ/ 1.40 max	1.25 typ/ 1.35 max	1.25 typ/ 1.30 max
Typical Insertion Loss (cable only)	1.79 dB/ft	1.52 dB/ft	0.84 dB/ft	0.67 dB/ft	0.54 dB/ft
Impedance (nominal)	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Phase Stability vs Bending ²	±8° typ/ ±15.6° max	±6° typ/ ±11.8° max	±5° typ/ ±9.5° max	±3.5° typ/ ±7.0° max	±2.0° typ/ ±4.5° max
Amplitude Stability vs Bending ³	±0.08 dB typ/ ±0.10 dB max	±0.05 dB typ/ ±0.08 dB max	±0.05 dB typ/ ±0.10 dB max	±0.02 dB typ/ ±0.04 dB max	±0.015 dB typ/ ±0.02 dB max
Phase Stability vs Temp	<4°/m/GHz (-55 ~ +125°C)				
Velocity of Propagation	76% (nominal)				
Shielding Effectiveness	>90 dB (DC – 18.0 GHz)				
Time Delay (nominal)	1.3ns/ft (4.4ns/m)				

¹ These specifications also apply to Stability™ Low-Profile (-LP) and Thermal Vacuum (-TV) cable assemblies (see page 5 & 7 respectively).

² Per IEC 60966-1, section 8.6, method 1.

³ Per IEC 60966-1, section 8.4.

Mechanical/Environmental Properties

STABILITY™ Cable Type	SC-185, SC-24, SC-292, SC-35 and SC-N	
Center Conductor Material	Silver-Plated Copper-Clad Steel	
Maximum Outer Diameter	SC-292/SC-35/SC-N 0.277 in (7.04mm)	SC-185/SC-24 0.244 (6.20mm)
Nominal Weight	1.61 oz/ft (150g/m)	1.02 oz/ft (95g/m)
Min. Static Bend Radius/ Min. Dynamic Bend Radius	1.0 in. (25.4mm)/ 2.0 in. (50.8mm)	
Flex Life Cycles ⁴	>20,000	
Crush Resistance	>254 lb/inch (44 kN/m)	
Operating Temperature Range	-67 ~ +257°F (-55 ~ +125°C)	
Fire Resistance ⁵	Yes	
Abrasion Resistance ⁶	Yes	
RoHS/REACH	Yes	

⁴ Per IEC 60966-1, section 9.3.

⁶ Per SAE AS5756.

⁵ Per MIL-C-87104.

Typical Configurations


Part Number	Length ⁷	Connector 1 ⁸	Connector 2 ⁸	Frequency
SC-185-MM-24	24 in.	1.85mm male	1.85mm male	67 GHz
SC-185-MM-36	36 in.			
SC-185-MM-48	48 in.			
SC-24-MM-24	24 in.	2.4mm male	2.4mm male	50 GHz
SC-24-MM-36	36 in.			
SC-24-MM-48	48 in.			
SC-292-MM-24	24 in.	2.92mm male	2.92mm male	40 GHz
SC-292-MM-36	36 in.			
SC-292-MM-48	48 in.			
SC-292-MM-60	60 in.			
SC-292-MM-78	78 in.			
SC-35-MM-24	24 in.	3.5mm male	3.5mm male	26.5 GHz
SC-35-MM-36	36 in.			
SC-35-MM-48	48 in.			
SC-35-MM-60	60 in.			
SC-35-MM-78	78 in.			
SC-N-MM-24	24 in.	N male	N male	18 GHz
SC-N-MM-36	36 in.			
SC-N-MM-48	48 in.			
SC-N-MM-60	60 in.			
SC-N-MM-78	78 in.			

⁷ Custom lengths are available by special order.


⁸ 1.85mm, 2.4mm, 2.92mm, 3.5mm connectors available in male and female.

Maury Stability™ Cable Assembly Typical Performance

Maury Stability™ 36" Cable Assembly Typical VSWR

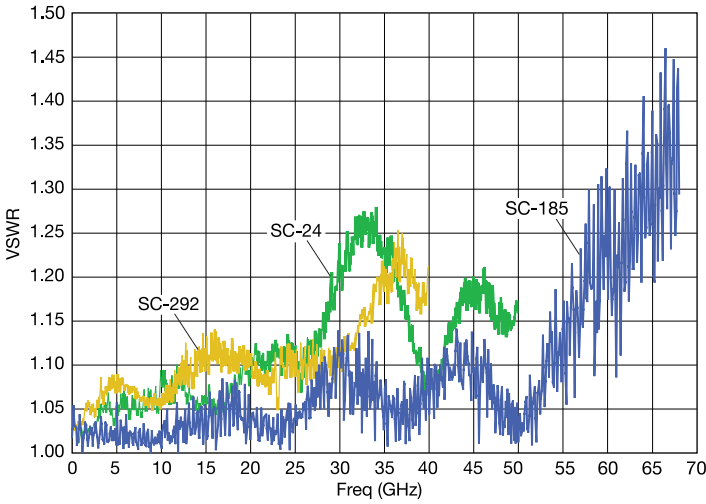

Maury Stability™ 36" Cable Assembly Typical Insertion Loss

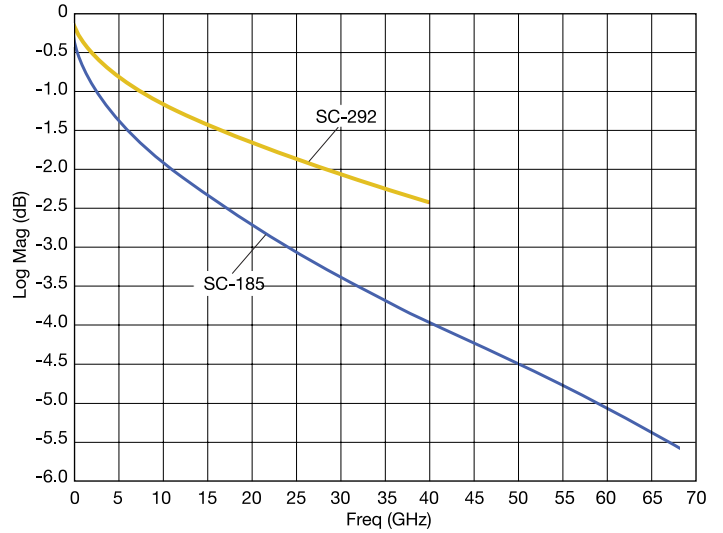

Stability™ Low-Profile Cable Assemblies (-LP)

Stability™ Low-Profile Cable Assemblies are designed for high-density applications such as switch matrices and PXI/PXIe/AXIe cards, as well as wafer-probe applications where traditional cable assemblies might cause interference due to cable and connector size. Stability™ Low-Profile Cable Assemblies offer the same electrical performance as Stability™ Microwave/RF Cable Assemblies in an configuration that is 44% smaller and 66% lighter ¹. Available with 2.4mm, 1.85mm, 3.5mm and 2.92mm connectors.

¹ For 2.92mm and 3.5mm connectors only.

Mechanical/Environmental Properties (-LP)

STABILITY™ Cable Type	SC-185, SC-24, SC-292 and SC-35
Center Conductor Material	Silver-Plated Copper-Clad Steel
Maximum Outer Diameter	0.156 in (3.95mm)
Nominal Weight	0.54 oz/ft (50g/m)
Minimum Bend Radius	1.0 in. (25.4mm)
Flex Life Cycles ²	>20,000
Crush Resistance	>23 lb/inch (4kN/m)
Operating Temperature Range	-67 ~ +257°F (-55 ~ +125°C)
Fire Resistance ³	Yes
RoHS/REACH	Yes


² Per IEC 60966-1, section 9.3.

³ Per MIL-C-87104.





Ordering Instructions for Stability™ Low Profile (-LP) Cable Assemblies

To specify a Stability™ Low Profile Cable Assembly, add "-LP" at the end of the SC model number, as shown in the example below.

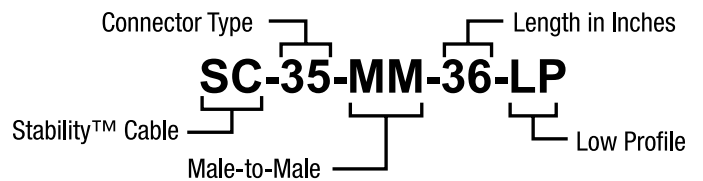


Stability™ Phase-Matched (PM) Cable Assembly Sets

Stability™ Phase-Matched Cable Assemblies have been designed for applications where strict phase equality between multiple paths are required. Stability™ PM Cable Assemblies are matched within $\pm 0.63^\circ/\text{GHz}$ and available as sets of two or more assemblies. Stability™ PM Cable Assemblies are offered in both standard and low-profile formats and maintain the mechanical and electrical characteristics of the original assembly. Phase matched assemblies are available with 1.85mm, 2.4mm, 2.92mm, 3.5mm and Type-N connectors and in all lengths. (See *Typical Configurations* table on page 3.)

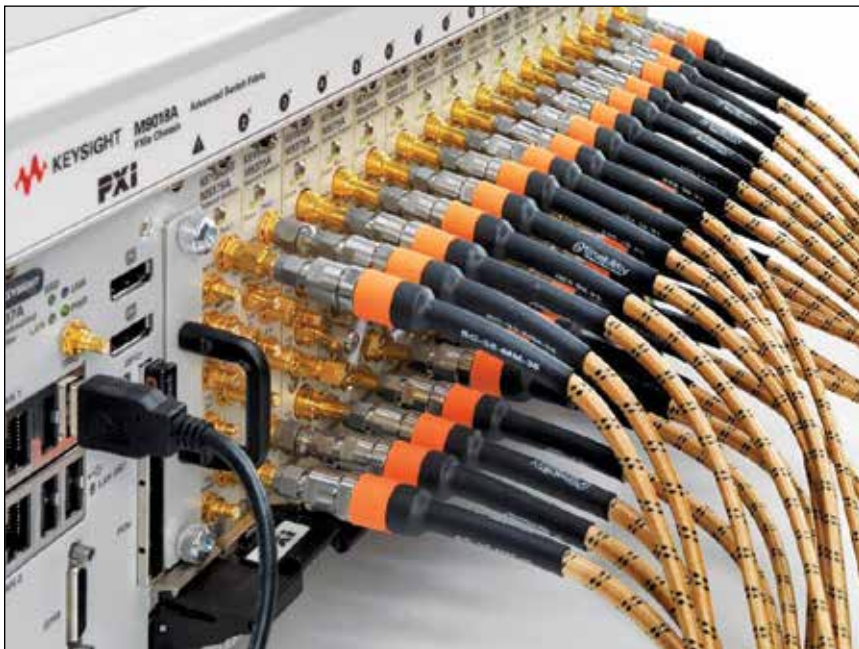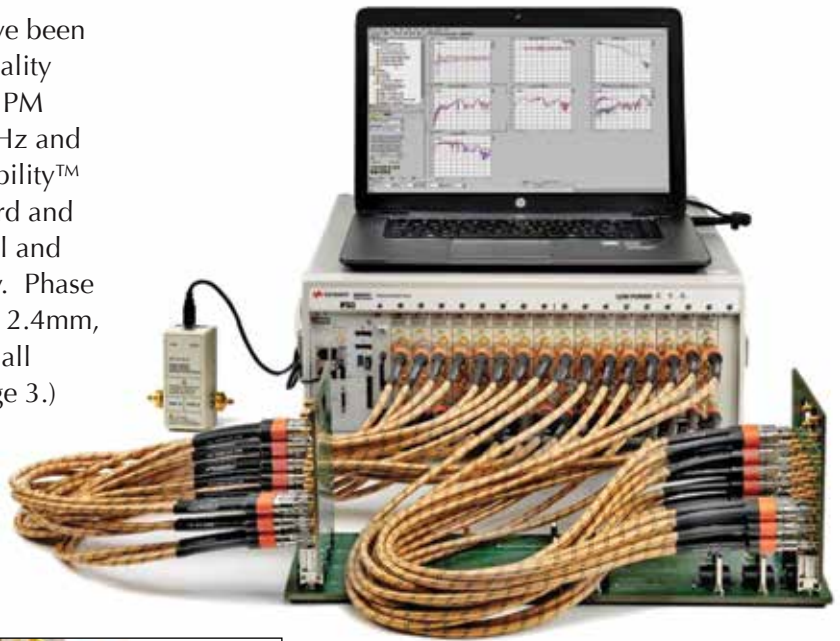

Ordering Instructions for Stability™ Phase-Matched (PM) Cable Assembly Sets

To specify a Stability™ Phase-Matched Cable Assembly set, add "PM" or "LPPM" at the end of the SC model number, as shown in the example below. "PM" indicates standard configuration Phase-Matched sets; "LPPM" indicates Low Profile configuration Phase-Matched sets.

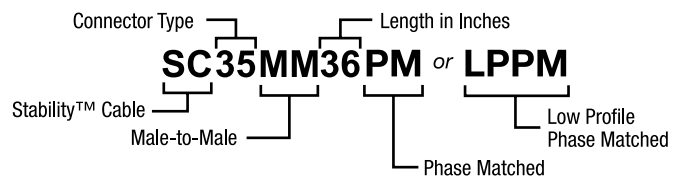


Stability™ Thermal Vacuum Cable Assemblies (-TV)

Stability™ TVAC Cable Assemblies have been designed for measurements in a thermal vacuum environment for space product testing. TVAC cable assemblies connect components or satellites located in thermal test chambers to systems and instruments outside. Stability™ TVAC Cable Assemblies offer

the same electrical and mechanical performance as Stability™ Microwave/RF Cable Assemblies with specialized vented 2.92mm connectors that meet low outgassing requirements of ESA-PSS-01-702 with a TML < 1% and CVCM < 0.1%.

Ordering Instructions for Stability™ Thermal Vacuum (-TV) Cable Assemblies

To specify a Stability™ Thermal Vacuum Cable Assembly, add "-TV" at the end of the SC model number, as shown in the example at the right.

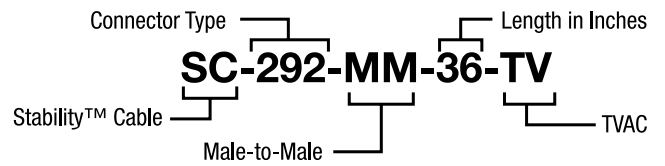



Contact Us:

Web: maurymw.com

Email: maury@maurymw.com

Voice: +1-909-987-4715

Fax: +1-909-987-1112