

# 3.5mm VNA Calibration Kits

DATA SHEET / 2Z-059

Models:

8050CK10 – Fixed Load Kit

8050CK11 – Fixed Load Kit Plus Adapters

8050CK20 – Sliding Load Kit - Basic

8050CK21 – Sliding Load Kit Plus Adapters

8050CK30 – TRL Kit - Basic

8050CK31 – TRL Kit Plus Adapters



# 3.5mm VNA Calibration Kits

8050CK10/11 SERIES, 8050CK20/21 SERIES, AND 8050CK30/31 SERIES

## Features

- > 3.5mm Connectors
- > DC to 26.5 GHz
- > Keysight, Rhode & Schwarz and Anritsu VNAs Supported

## Calibration Methods Supported

- > 8050CK10/11 – Fixed Load SOLT (DC–26.5 GHz)
- > 8050CK20/21 – Fixed/Sliding Load SOLT (DC–26.5 GHz)
- > 8050CK30/31 – TRM/TRL/LRL (DC–26.5 GHz)

## The Importance of VNA Calibration

Imperfections exist in even the finest test equipment. If un-corrected these systematic imperfections cause the equipment to yield less accurate measurements. The basis of network analyzer error correction is referred to as “calibration” of which multiple methods exist.

### Calibration Methods

SOLT calibration, which uses Short, Open and Load standards, requires precise models of the standards’ electrical performance. Fixed load SOLT uses fixed terminations and is adequate for measuring devices with mid-range reflection coefficients. The lowest return loss is limited by the reflection coefficient of the fixed load standard (typically better than 20 dB return loss\*).

The sliding load SOLT kit can accurately measure lower reflection coefficients due to the improved termination performance provided by the sliding load (typically better than 30 dB return loss).

TRL calibration, using Thru, Reflect and Line standards, relies on the characteristic impedance of the air lines (Line). TRL calibration is the most accurate method of measuring devices at low (typically better than 40 dB return loss) and high reflection coefficients. \*Refer to specifications on page 3.

8050CK10/11/20/21 kits are configured for use in performing one-port SOL (Short-Open-Load) response calibrations (a method used for measuring VSWR/ Return Loss), and full two-port SOLT (Short-Open-Load-Thru) calibration (for performing forward and reverse transmission and reflections measurement).

8050CK30/31 TRL/LRL calibration kits contain the components needed to perform TRM, TRL and LRL calibrations. Source match can also be measured using the 15cm air line with the short circuit provided.

8050CK11/21/31 kits include three 3.5mm in-series adapters for applications that require female/female, male/male, or male/female connections. A wide range of between-series adapters in 3.5mm to other types are also available by separate order.

A050A



8799A1



8009A

8009B

7909B1

7909B2



## Recommended Accessories

### A050A Digital Connector Gage Kit:

Contains two “thread-on” type, digital gages for measuring female and male contact pin location. They provide an easy and accurate way to measure critical linear interface dimensions of 2.92mm and 3.5mm coaxial connectors.

### 8799A1 5/16-inch Precision Torque Wrench (8.0 inch lbs):

For proper torquing of 1.85mm, 3.5mm, 2.92mm and 3.5mm connections. Factory preset to 8.0 inch lbs to ensure the precise torque needed for optimum repeatability. Employs a “break” design that makes it impossible to over-torque your connections. These torque wrenches are provided with 8050CK20/21 and 8050CK30/31 kits, and are highly recommended for use with 8050CK10/11 kits.

### 8009A & 8009B 3.5mm NMD test port adapters:

Precision 3.5mm to NMD3.5mm; DC–26.5 GHz. Saves unnecessary wear and tear on your VNA test ports.

### 7909B1 & 7909B2 2.4mm NMD test port adapters:

Precision NMD2.4mm to 3.5mm; DC–34.0 GHz. Saves unnecessary wear and tear on your VNA test port connectors.

Go to [www.maurymw.com/Precision/Adapters.php](http://www.maurymw.com/Precision/Adapters.php) to see all Maury 3.5mm in-series and between series adapters.

## Maury 2.4mm VNA Calibration Kits

Maury precision 3.5mm VNA calibration kits include each of the calibration standards and tools shown in the tables at the right. The 8050CK10/20/30 kits do not include adapters; the 8050CK11/21/31 kits include one each of the in-series adapters shown. Other in-series and between-series adapters are sold separately.

### Components Included in 8050CK10/11 Kits

QUANTITY	DESCRIPTION	MODEL
1	3.5mm female fixed short circuit	8046F
1	3.5mm male fixed short circuit	8047F
1	3.5mm female open circuit termination	8048A1
1	3.5mm male open circuit termination	8048B1
1	3.5mm female fixed termination	8031A5
1	3.5mm male fixed termination	8031B5
1*	3.5mm female to 3.5mm female adapter	8021A5
1*	3.5mm male to 3.5mm male adapter	8021B2
1*	3.5mm female to 3.5mm male adapter	8021C2
1	Foam-lined wood Instrument case	—

\* These adapters are provided in the 8050CK11 kits, but are not included in the 8050CK10 kits.

### Components Included in 8050CK20/21 Kits

QUANTITY	DESCRIPTION	MODEL
1	3.5mm female fixed short circuit	8046F
1	3.5mm male fixed short circuit	8047F
1	3.5mm female open circuit termination	8048A1
1	3.5mm male open circuit termination	8048B1
1	3.5mm female fixed termination	8031A5
1	3.5mm male fixed termination	8031B5
1*	3.5mm female to 3.5mm female adapter	8021A2
1*	3.5mm male to 3.5mm male adapter	8021B2
1*	3.5mm female to 3.5mm male adapter	8021C2
1	3.5mm female sliding termination	8037A
1	3.5mm male sliding termination	8037B
1	Pin depth adjusting tool	8777S02
1	5/16-inch torque wrench — 8 in. lbs.	8799A1
1	7/16-inch double end wrench	8770Z7
1	5/16-inch double end wrench	8770Z6
1	Foam-lined wood Instrument case	—

\* These adapters are provided in the 8050CK21 kits, but are not included in the 8050CK20 kits.

### Components Included in 8050CK30/31 Kits

QUANTITY	DESCRIPTION	MODEL
1	3.5mm female fixed short circuit	8046F
1	3.5mm male fixed short circuit	8047F
1	3.5mm female fixed termination	8031A5
1	3.5mm male fixed termination	8031B5
1*	3.5mm female to 3.5mm female adapter	8021A2
1*	3.5mm male to 3.5mm male adapter	8021B2
1*	3.5mm female to 3.5mm male adapter	8021C2
1	3.5mm female to male air line (5cm)	8043S5
1	3.5mm female to male air line (5.25cm)	8043S5.3
1	3.5mm female to male air line (6cm)	8043S6
1	3.5mm female to male air line (15cm)	8043S15
1	5/16-inch torque wrench — 8 in. lbs.	8799A1
1	7/16-inch double end wrench	8770Z7
1	5/16-inch double end wrench	8770Z6
1	Foam-lined wood Instrument case	—

\* These adapters are provided in the 8050CK31 kits, but are not included in the 8050CK30 kits.

8050CK10



8050CK11



8050CK20



8050CK21



8050CK30



8050CK31



## COMPONENT SPECIFICATIONS



### Air Lines – Models 8043S15, 8043S6, 8043S5.3 & 8043S5

Frequency Range -- DC to 26.5 GHz

Electrical Length:

8043S15 -- 15cm

8043S6 -- 6cm

8043S5.3 -- 5.3cm

8043S5 -- 5cm

Electrical Length Accuracy --  $\pm 0.0025$ cm

Minimum Return Loss (excluding connector interface) -- 48 dB

Nominal Impedance -- 50 ohm



### Sliding Terminations – Models 8037A & 8037B

Frequency Range -- 2.0 to 34.0 GHz

Maximum VSWR of Terminating Element:

2.0 to 4.0 GHz -- 1.09

4.0 to 34.0 GHz -- 1.05

Air Line Accuracy -- 50 dB min return loss (equivalent return loss of air line impedance)

Nominal Impedance -- 50 ohm

Power Handling -- 1.0 watt CW, 1.0 kW peak

Travel -- Greater than 1/2 wavelength at 2.0 GHz



### Fixed Terminations – Models 8031A5 & 8031B5

Frequency Range -- DC to 26.5 GHz

Maximum VSWR:

DC to 3.0 GHz -- 1.020

3.0 to 6.0 GHz -- 1.032

6.0 to 20.0 GHz -- 1.052

20.0 to 26.5 GHz -- 1.083

Power Handling -- 0.25 watt CW, 0.5 kW peak

Nominal Impedance -- 50 ohm



### Fixed Shorts – Models 8046F & 8047F

Frequency Range -- DC to 26.5 GHz

Minimum Reflection Coefficient -- 0.98

Phase Accuracy --  $\pm 2.0$  degrees

Nominal Impedance -- 50 ohm



### Open Circuits – Models 8048A1 & 8048B1

Frequency Range -- DC to 26.5 GHz

Minimum Reflection Coefficient -- 0.98

Phase Accuracy --  $\pm 1.4$  degrees

Nominal Impedance -- 50 ohm



### Precision 3.5mm Adapters – Models 8021A2/B2/C2

Frequency Range -- DC to 34.0 GHz

Maximum VSWR:

DC to 18.0 GHz -- 1.05

18.0 to 26.5 GHz -- 1.08

26.5 to 34.0 GHz -- 1.12


Nominal Impedance -- 50 ohm

*(Note: These adapters are included in the 8050CK11/21/31 kits, but are not included in the 8050CK10/20/30 kits.)*

## Connector Description


The precision 3.5mm connectors on the components in these kits are miniature, instrument grade, air-interface connectors that operate mode free up to 34 GHz, and comply with IEEE standard 287 general precision connector, instrument grade GPC3.5.

For detailed interface specifications please refer to Maury data sheet 5E-062.

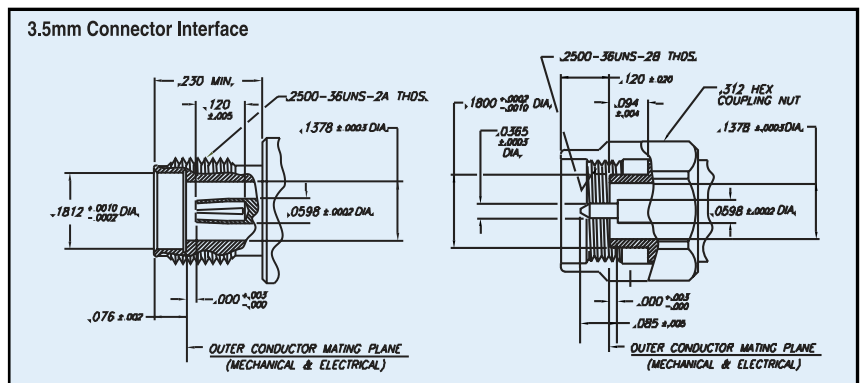



VISIT OUR WEB STORE  
TO LEARN MORE ABOUT  
OUR PRODUCTS

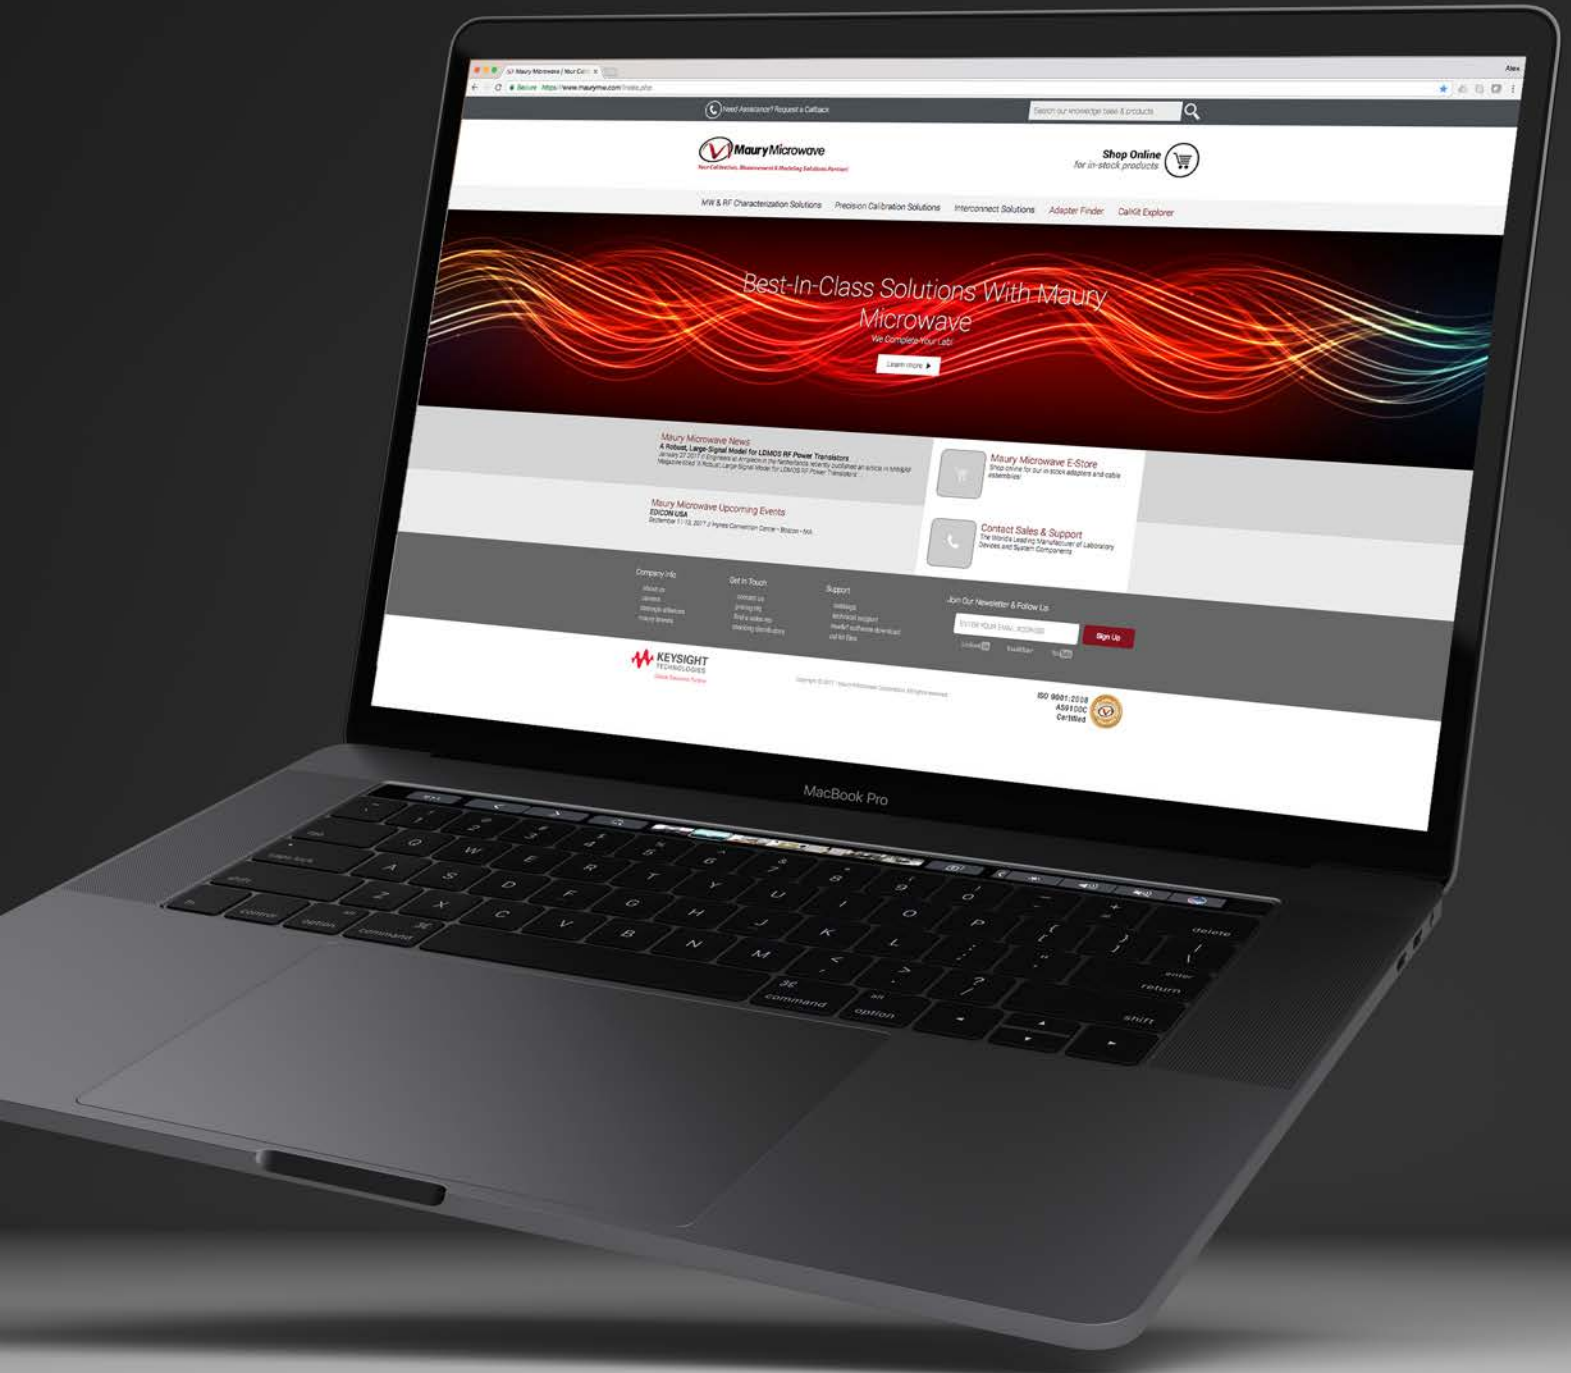

www.maurymw.com



**CONTACT US:**

W / [maurymw.com](http://maurymw.com)

E / [maury@maurymw.com](mailto:maury@maurymw.com)

P / +1-909-987-4715

F / +1-909-987-1112

2900 Inland Empire Blvd

Ontario, CA 91764

